


APPLICATION OVERVIEW

Existing Structure & Repair - Swimming Pool

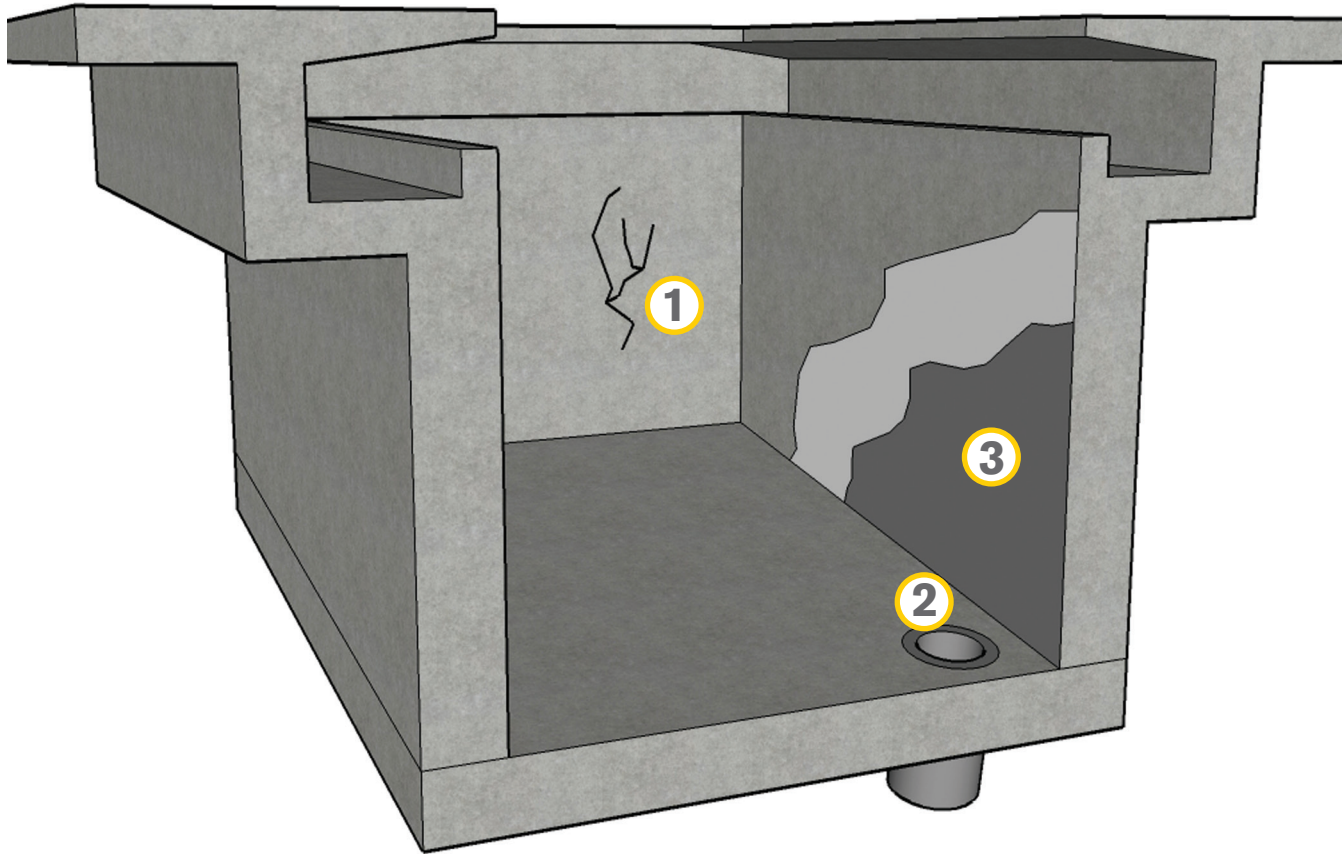

1. Use the Krystol Crack Repair System to treat leaking cracks and joints. Refer to Application Instruction 5.12 — Waterproofing Cracks, Holes and Joints.
2. Use Krystol Plug, Krystol T1 and Krystol Krystol Waterstop Grout to waterproof leaking pipe penetrations. Refer to Application Instruction 5.32 — Waterproofing Pipe Penetrations (Existing Construction).
3. Apply Krystol T1 and T2 surface treatment to the slab and walls to prevent further water ingress. Refer to Application Instruction 2.11 & 2.11B — Waterproofing with Surface-Application .