


Kryton Buildmat Co. Pvt. Ltd. 136-137 Centrum Plaza, Golf Course Road, Sector 53, Gurugram, Haryana 122002

Telefax: +91-124-4381140 / 41 Email: custcare@kryton.in Web: www.kryton.in

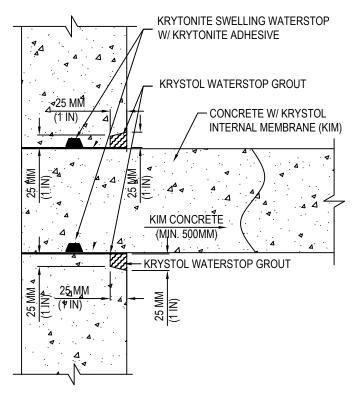

WALL TO ELEVATED SLAB DOUBLE PROTECTION

MANUFACTURER'S NOTES:

- 1. PLACE CONCRETE TREATED WITH KRYSTOL INTERNAL MEMBRANE (KIM).
- 2. INSTALL KRYTONITE SWELLING WATERSTOP IN CENTER OF SLAB, USING KRYTONITE ADHESIVE
- 3. CREATE U- SHAPE GROOVE / ROUT OUT SIZE 25MM X 25MM AT THE INTERSECTION WHERE THE TWO CONCRETE SECTIONS
- 4. TIGHTLY PACK U- SHAPE GROOVE / ROUT OUT SIZE 25MM X 25MM FLUSH TO THE SURFACE WITH KRYSTOL WATERSTOP GROUT)

NOTES:

- 1. INSTALLATION TO BE COMPLETED IN ACCORDANCE WITH MANUFACTURER'S SPECIFICATIONS.
- 2. DO NOT SCALE DRAWING.
- 3. THIS DRAWING IS INTENDED FOR USE BY ARCHITECTS, ENGINEERS, CONTRACTORS, CONSULTANTS AND DESIGN PROFESSIONALS FOR PLANNING PURPOSES ONLY. THIS DRAWING MAY NOT BE USED FOR CONSTRUCTION.
- 4. ALL INFORMATION CONTAINED HEREIN WAS CURRENT AT THE TIME OF DEVELOPMENT BUT MUST BE REVIEWED AND APPROVED BY THE PRODUCT MANUFACTURER TO BE CONSIDERED ACCURATE.



WTE 5104-029 REVISION DATE 2024