




SMART CONCRETE®

Kryton Buildmat Co. Pvt. Ltd.
136-137 Centrum Plaza, Golf
Course Road,
Sector 53, Gurugram, Haryana
122002
Telefax: +91-124-4381140 / 41
Email: custcare@kryton.in
Web: www.kryton.in

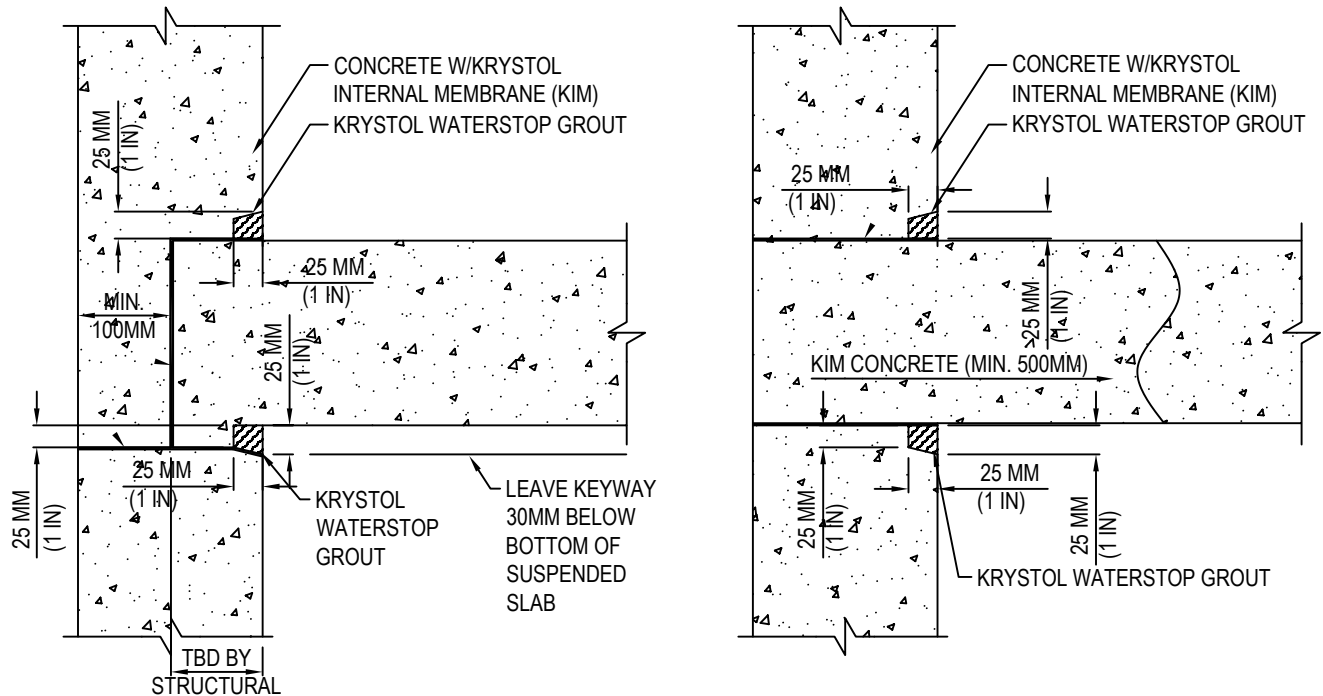


WALL TO ELEVATED SLAB CONTRUCTION JOINTS
SINGLE PROTECTION; EXTERNAL GROUT METHOD

MANUFACTURER'S NOTES:

1. PLACE CONCRETE TREATED WITH KRYSTOL INTERNAL MEMBRANE (KIM).
2. CREATE U- SHAPE GROOVE / ROUT OUT SIZE 25MM X 25MM AT THE INTERSECTION WHERE THE TWO CONCRETE SECTIONS
3. TIGHTLY PACK U- SHAPE GROOVE / ROUT OUT SIZE 25MM X 25MM FLUSH TO THE SURFACE WITH KRYSTOL WATERSTOP (GROUT)

NOTES:

1. INSTALLATION TO BE COMPLETED IN ACCORDANCE WITH MANUFACTURER'S SPECIFICATIONS.
2. DO NOT SCALE DRAWING.
3. THIS DRAWING IS INTENDED FOR USE BY ARCHITECTS, ENGINEERS, CONTRACTORS, CONSULTANTS AND DESIGN PROFESSIONALS FOR PLANNING PURPOSES ONLY. THIS DRAWING MAY NOT BE USED FOR CONSTRUCTION.
4. ALL INFORMATION CONTAINED HEREIN WAS CURRENT AT THE TIME OF DEVELOPMENT BUT MUST BE REVIEWED AND APPROVED BY THE PRODUCT MANUFACTURER TO BE CONSIDERED ACCURATE.



KRYSTOL WATERSTOP SYSTEM

WALL TO ELEVATED SLAB – SINGLE PROTECTION – EXT GROUT METHOD